SPECIFICATION

REFOND P/N

RF-A2A31-W578-A2

P$B

Mass Production

0755-2967-5000
0755-6683-9322
sales@refond.com

Contents

1. Description 3
1.1General Description 3
1.2Features 3
1.3Application 3
1.4Package Dimension 4
1.5Product Parameters 5
1.6 Bin Range Of Forward Voltage and Luminous Intensity (IF=50mA) BIN (IF=50mA) 6
1.7 Typical Optical Characteristics Curves 8
2. Packaging 13
2.1 Packaging Specification 13
2.1.1Carrier Tape Dimension 13
2.1.2Reel Dimension 13
2.1.3Label Form Specification 14
2.2Moisture Resistant Packing 14
2.3Cardboard Box 14
2.4Reliability Test Items And Conditions 15
2.5 Criteria For Judging Damage 16
1, SMT Reflow Soldering Instructions SMT 17
3.1SMT Reflow Soldering Instructions SMT 17
4. Handling Precautions 19
4.1 Handling Precautions 19

0755-2967-5000
0755-6683-9322
sales@refond.com

1. Description

1.1General Description

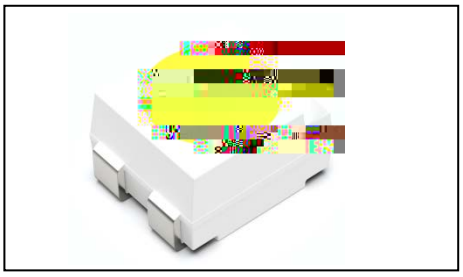

The White LED, which was fabricated by using a blue chip and the phosphor.

Product Package: 3.50mmX2.80mmX1.85mm.

JCB 3.50mmX2.80mmX1.85mm.

1.2Features

- yPLCC4 Package. PLCC4
- yExtremely wide viewing angle.
- ySuitable for all SMT assembly and solder process QKR
- yAvailable on tape and reel
- yMoisture sensitivity level: Level 2 Jctcj0
- yRoHS compliant. RoHS
- yQualifications: The product qualification testplan is based on the guidelines of AEC-Q102 Stress Test Qualification for Automotive Grade Discrete Semiconductors

?CA+O/.0

1.3Application

- yAutomotive Interior and Exterior Lighting.
- ʒ Switches.

0755-2967-5000
0755-6683-9322
sales@refond.com

1.4Package Dimension

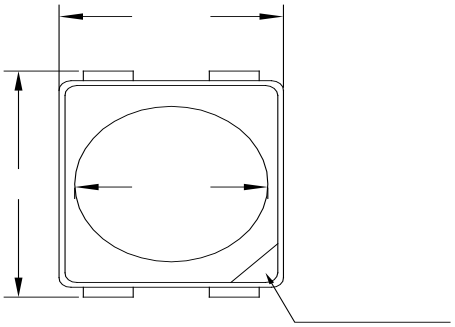



Fig.1-2 SideView侧面视图



Fig.1-3 BottomView背面视图



Fig.1-4 Polarity极性

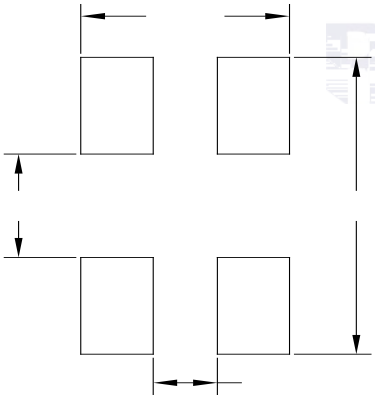

Fig.1-5 Soldering Patterns推荐焊盘

Notes

/, All dimensions units are millimeters.

0, All dimensions tolerances are ±0.2mm unless otherwise noted. ®.,0

0755-2967-5000
0755-6683-9322
sales@refond.com

1.5Product Parameters

Table 1-1 Electrical / Optical Characteristics at Ts=25°C

Item	Symbol	Test Condition	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	IF=50mA	2.8	---	3.3	V
Reverse Current	I_R	V_R=5V	---	---	10	uA
Luminous Intensity	IV	IF=50mA	5300	---	10000	mcd
Viewing Angle		IF=50mA	---	120	---	deg
Thermal Resistance (Junction to Solder)	$R_{th\ JS}$ real	I_F=50mA	---	130	180	℃/W
	$R_{th\ JS}$el	I_F=50mA	---	80	110	℃/W

Table 1-2 Absolute Maximum Ratings at Ts=25°C

Parameter	Symbol	Rating	Units
Power Dissipation	P_D	231	mW
Forward Current	I_F	70	mA
Peak Forward Current	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Electrostatic Discharge (HBM)	E_{SD}	2000	V
Operating Temperature	T_{OPR}	-40 ~ +100	-
Storage Temperature	T_{STG}	-40 ~ +100	-
Junction Temperature	T_J	120	-

0755-2967-5000
0755-6683-9322
sales@refond.com

Notes

1. 1/10 Duty cycle, 10ms pulse width. / . k q* / - / . ,

2. The above forward voltage measurement allowance tolerance is ±0.1V. ® . , / T,

3. The above color coordinates measurement allowance tolerance is ±0.005. ± . , . . 3,

4. The above luminous intensity measurement allowance tolerance ±10%.

® / . # ,

5. Care is to be taken that power dissipation does not exceed the absolute maximum rating of the product.

k

6. All measurements were made under the standardized environment of Refond.

k

7.When the LEDs are in operation the maximum current should be decided after measuring the package temperature, junction temperature should not exceed the maximum rate, JCB

k

8.At 25 , pulse mode test, photoelectric conversion efficiency [illegible] 4.

.

.

0755-2967-5000
0755-6683-9322
sales@refond.com

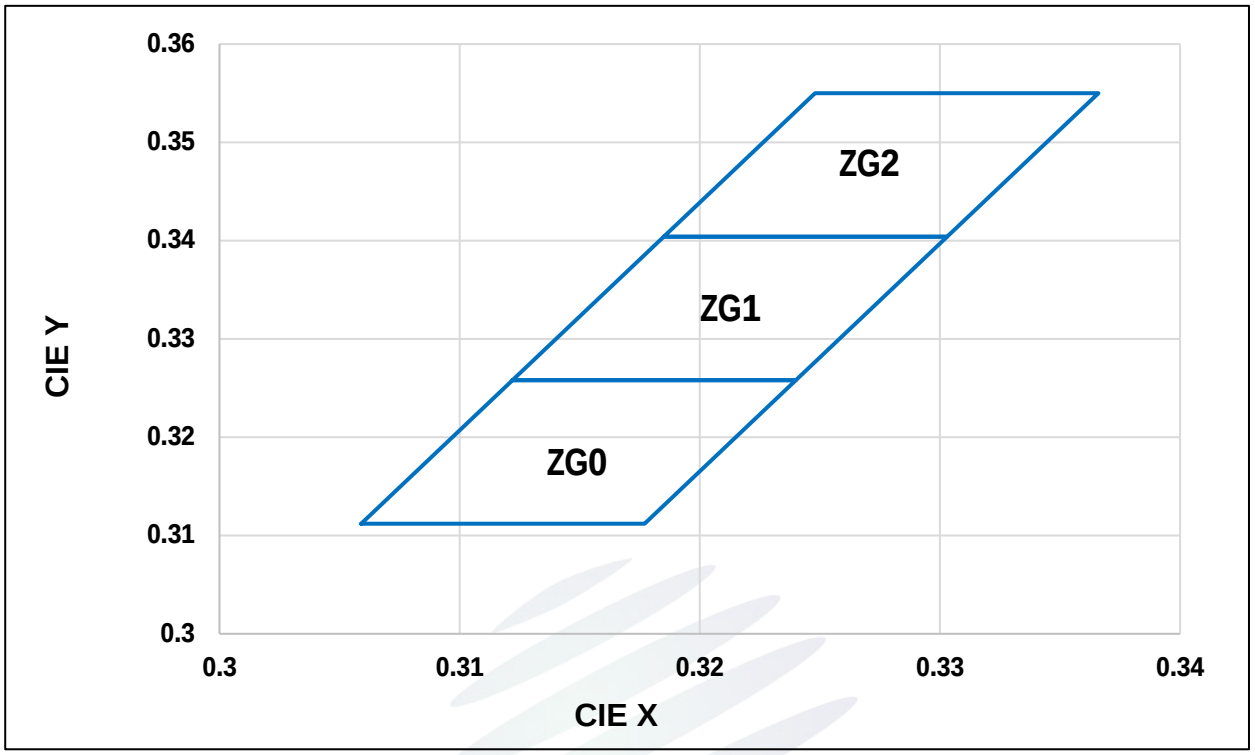

Fig. 1-6 The C.I.E Chromaticity Diagram CIE

Table 1-4

BIN CODE	CIE-X1	CIE-Y1	CIE-X2	CIE-Y2	CIE-X3	CIE-Y3	CIE-X4	CIE-Y4
ZG0	0.3115	0.3200	0.3150	0.3300	0.3265	0.3300	0.3230	0.3200
ZG1	0.3122	0.3258	0.3185	0.3404	0.3303	0.3404	0.3240	0.3258
ZG2	0.3185	0.3404	0.3248	0.355	0.3366	0.355	0.3303	0.3404

0755-2967-5000
0755-6683-9322
sales@refond.com

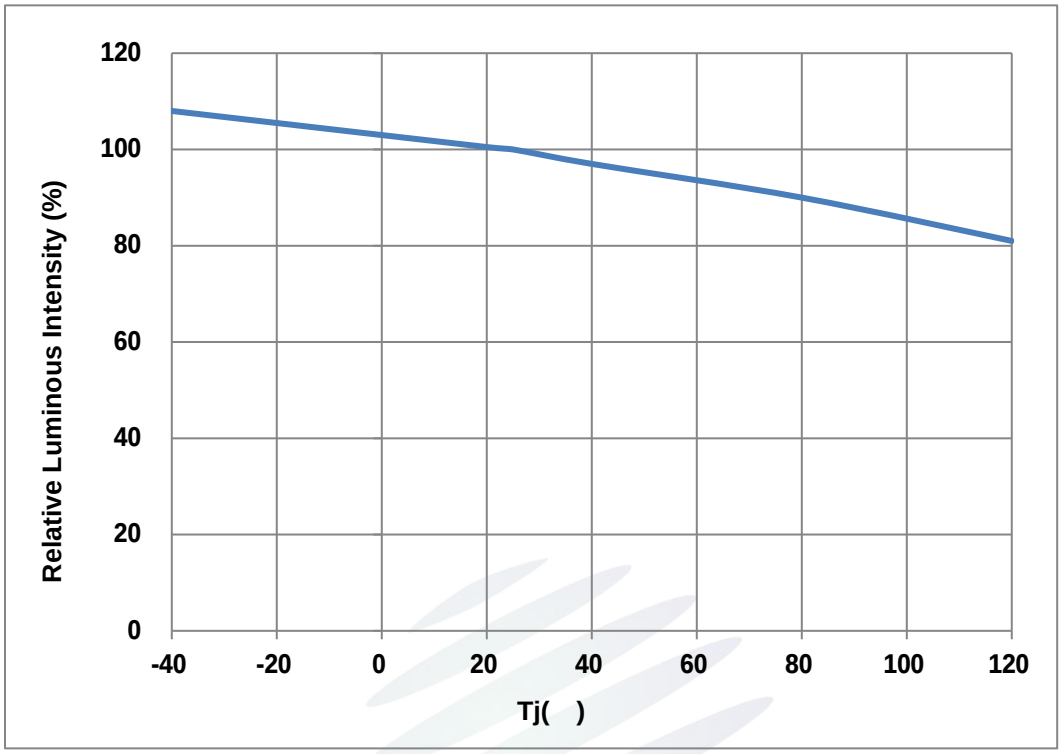

Fig. 1-9 Junction Temperature Vs Relative Intensity

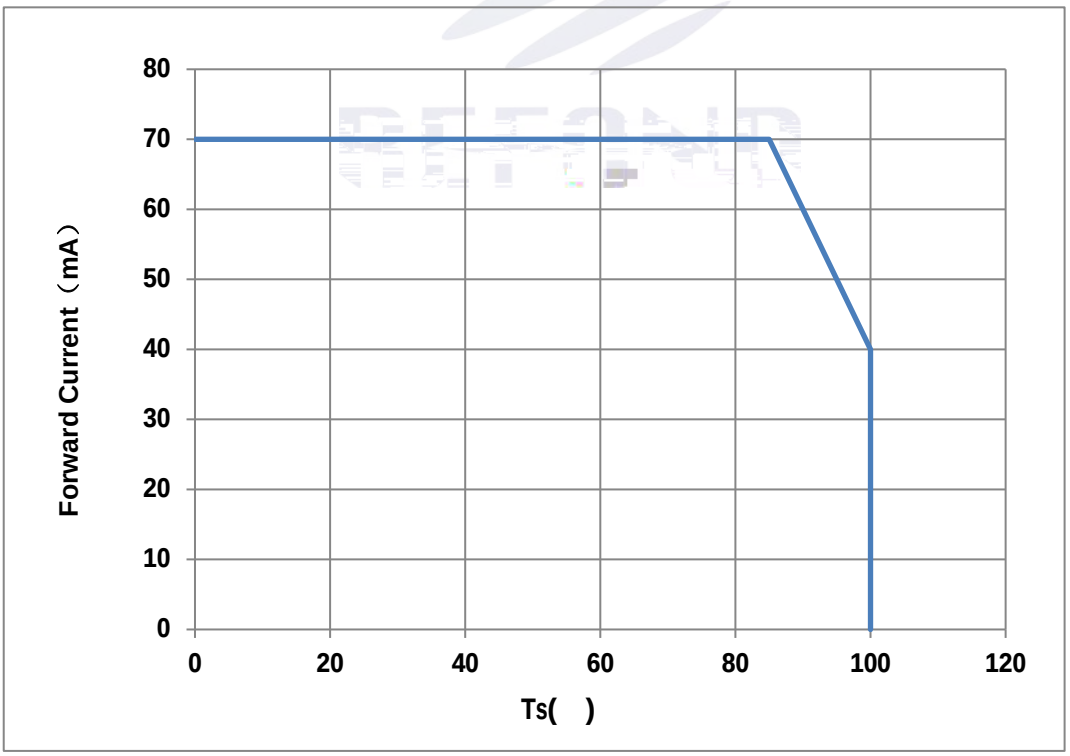

Fig. 1-10 Solder Temperature Vs Forward Current

0755-2967-5000
0755-6683-9322
sales@refond.com

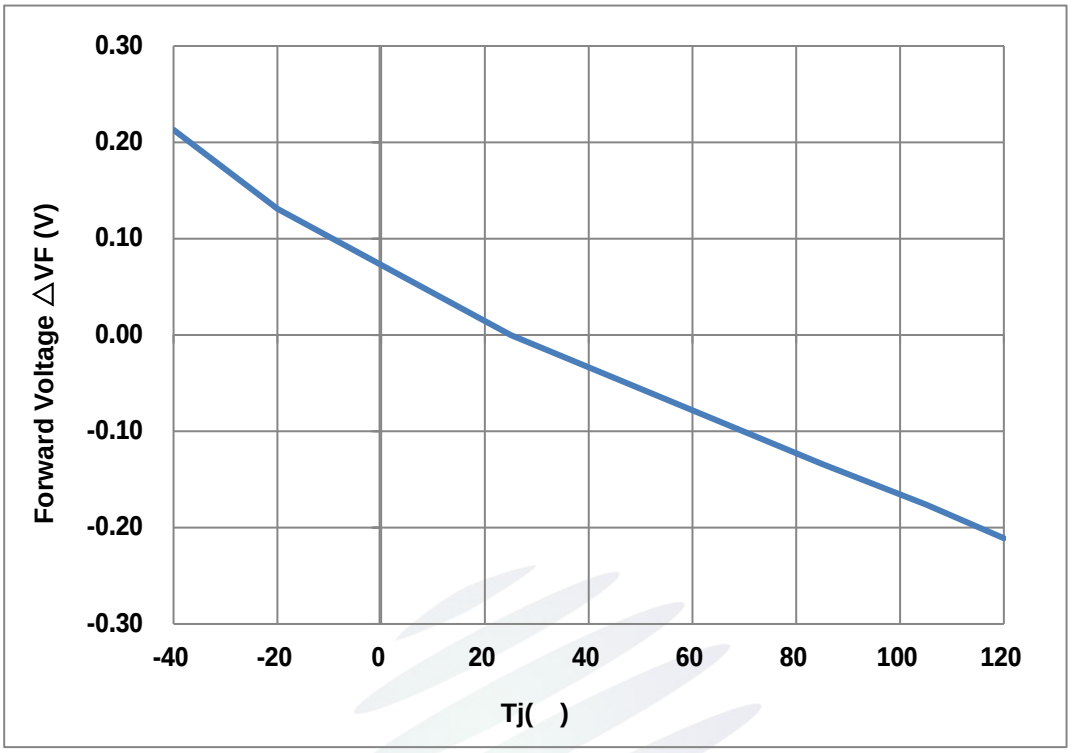

Fig. 1-11 Voltage shift Vs Junction Temperature

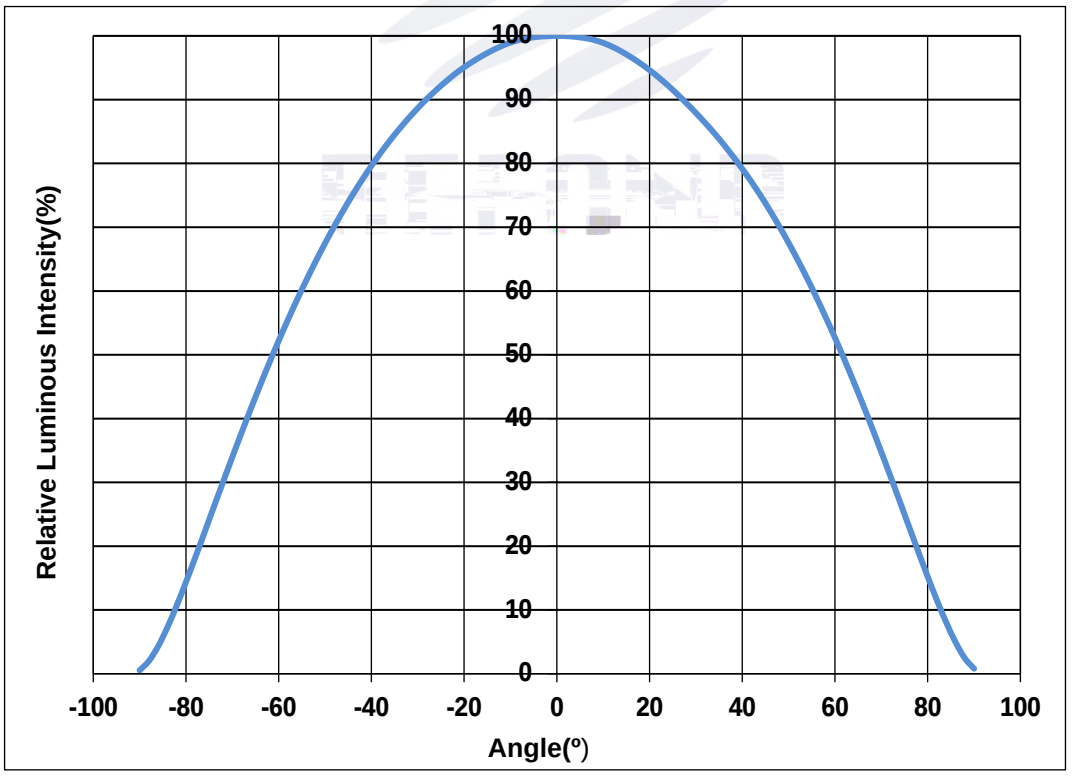

Fig. 1-12 Radiation diagram

0755-2967-5000
0755-6683-9322
sales@refond.com

0755-2967-5000
0755-6683-9322
sales@refond.com

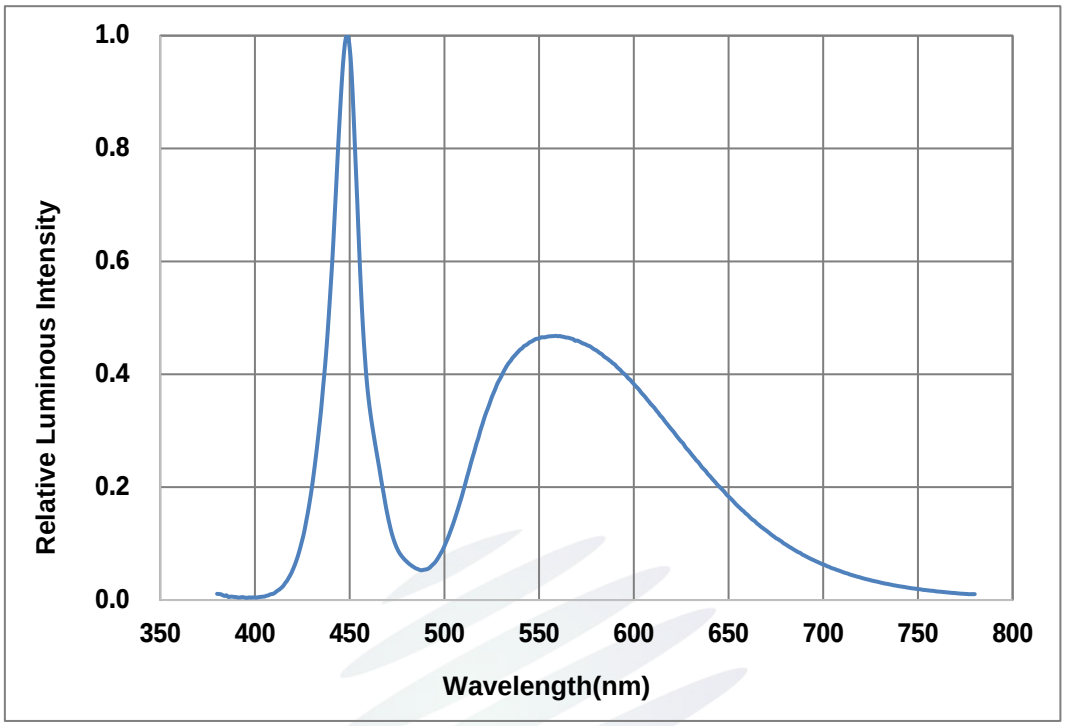

Fig. 1-15 Spectrum Distribution

0755-2967-5000
0755-6683-9322
sales@refond.com

2.1.3Label Form Specification

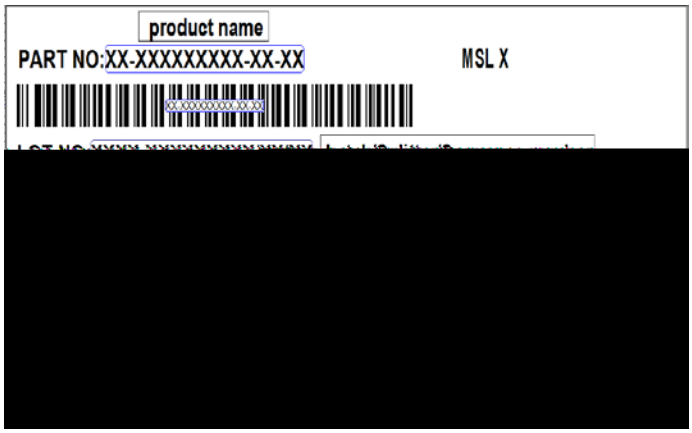

Fig. 2-3 Label Form Specification

_`jc 0+0 Specification

PART NO.	Part Number
SPEC NO.	Spec Number
LOT NO.	Lot Number
BIN CODE	Bin Code
IV	Luminous Intensity
XY	Chromaticity Bin
V_F	Forward Voltage
WLD	Wavelength
QTY	Packing Quantity
DATE	Made Date

2.2Moisture Resistant Packing

Fig.2-4Moisture Resistant Packing

2.3Cardboard Box

Fig.2-5Cardboard Box

0755-2967-5000
0755-6683-9322
sales@refond.com

2.4Reliability Test Items And Conditions

Table 2-3 Reliability Test Items And Conditions

Test Items	Ref.Standard	Test Condition	Time	Quantity	Ac/Re /
Reflow	JESD22-B106	Temp:260, max T=10 sec	2times	20pcs.	0/1
MSL2 2	JESD22-A113	85, / 60%R_H	168 hrs.	20pcs.	0/1
Thermal Shock	JEITAED-4701 300307	-40, 15min 9 ;10s 125, 15min	1000 cycle	20pcs.	0/1
Life Test	JESD22-A108	Ta=100, IF=50mA	1000hrs.	20pcs.	0/1
High Temperature High Humidity Life Test	JESD22-A101	85, / 85%R_H IF=50mA	1000hrs.	20pcs.	0/1

0755-2967-5000
0755-6683-9322
sales@refond.com

2.5 Criteria For Judging Damage

Table 2-4Criteria For Judging Damage

Test Items	Symbol	Test Condition	Criteria For Judgement	
			Min.	Max.
Forward Voltage	V_F	IF=50mA	-	U.S.L*)x1.1
Reverse Current	I_R	V_R = 5V	-	U.S.L*)x2.0
Luminous Flux	N	IF=50mA	L.S.L*)x0.7	-

Notes

1.U.S.L: Upper standard level L.S.L: Lower standard level

2.The above reliability tests is based on the verification of a single/strip LED of Refond's existing experimental platform,the reliability experiment was taken under good heat dissipation conditions. when customers applies the LED to the series and parallel circuit, should take consideration of all the factors such as the current, voltage distribution, heat dissipation and others. - JCB

k JCB ! ! ! k

3.The technical information shown in the data sheets is limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license. k

0755-2967-5000
0755-6683-9322
sales@refond.com

1, SMT Reflow Soldering Instructions SMT

3.1SMT Reflow Soldering Instructions SMT

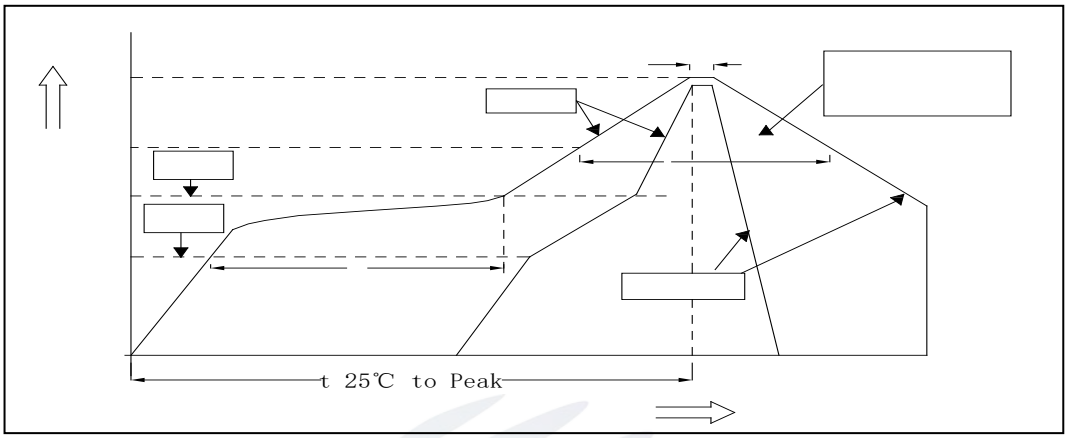

Fig.3-1SMT Reflow Soldering Instructions SMT

Table 3-1Reflow parameters

Average temperature rise speed Tsmax T_P	3 °C/ Max 3 °C/ s
Preheating: minimum temperature (Tsmin)	150 °C
Preheating: Max temperature (Tsmax)	200 °C
Preheating: Time Tsmin Tsmax	60 - 120 60s-120s
Time limited to maintain high temperature: the temperature (T_L)	217 °C
Time limited to maintain high temperature: The Time (t_L)	60 Max 60s
Peak /Classification of temperature: / (T_P)	260 °C
Time limit classification of peak temperature time t_p	10 Max 10s
(T_P) 5 °C Hold time within 5 -C with the actual peak temperature (TP)	30 Max 30s
Cooling speed	6 °C/ Max 6 °C/ s
25 °C Needed time from 25 °C to Tp	8 Max 8 minutes

0755-2967-5000
0755-6683-9322
sales@refond.com

Notes

(1)Reflow soldering should not be done more than twice. If more than 24 hours between the two solderings ,LED will be damaged. 02 JCB

k

(2)When soldering , do not put stress on the LEDs during heating. k

3.1.1 Repairing

Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable,a double-head soldering iron should be used (as below figure). It should be confirmed in advance whether the characteristics of LEDs will or not be damaged by repairing.

LED JCB

k

3.1.2 Cautions

The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be impacted on the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when use the picking up nozzle, the pressure on the silicone resin should be proper. LED JCB

k

(2) Components should not be mounted on warped (non coplanar) portion of PCB. After soldering, do not warp the circuit board.LED NA@ k

(3) Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering. Do not rapidly cool device after soldering.

k

0755-2967-5000
0755-6683-9322
sales@refond.com

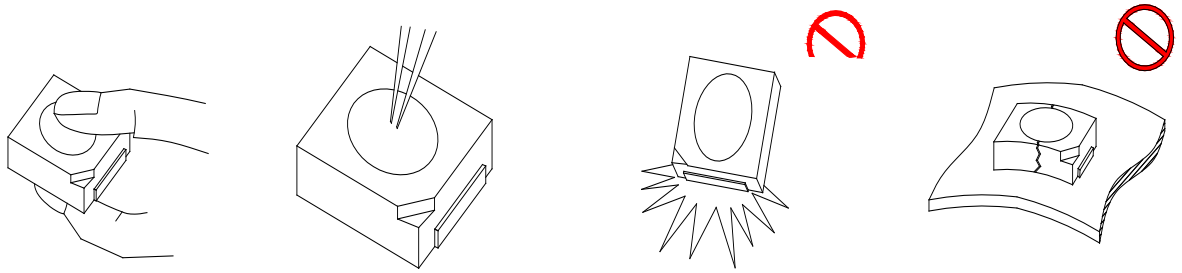

Fig 4-1Cautions

(5) In designing a circuit,the current through each LED can not exceed the absolute maximum rating specified for each LED.In the mean while,resistors for protection should be applied,other wise slight voltage shift will cause big current change,burn out may happen. The driving circuit must be designed to allow forward voltage only when it is ON or OFF.If the reverse voltage is applied to LED, migration can be generated resulting in LED damage. JCB

k

JCB k

(6) Thermal Design is paramount importance because heat generation may result in the Characteristics decline,such as brightness decreased,Color change and so on.Please consider the heat generation of the LEDs when making the system design.LED JCB

k

(7) Compared to standard encapsulants, silicone is generally softer, and the surface is more likely to attract dust,requiring special care during processing. In cases where a minimal level of dirt and dust particles cannot be guaranteed, a suitable cleaning solution must be applied to the surface after the soldering of components. Refond suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin. Ultrasonic cleaning is not recommended. Ultrasonic cleaning may cause damage to the LED.

JCB k

0755-2967-5000
0755-6683-9322
sales@refond.com

Table 4-1Storage

Conditions		Temperature	Humidity	Time
Storage 储存	Before Opening Aluminum Bag	30¸	75%	Within 1 Year From Date
	After Opening Aluminum Bag	30¸	60%	Recommended for use within 24 hours 24
Baking		60®5¸	-	24hours 24

(8) If the moisture absorbent material silica gel has faded away or the LEDs have exceeded the storage time,baking treatment should be performed after unpacking and based on the following condition 60±5 for above 24 hours.

4.®3¸ 02 k

If the package is flatulence or damaged,please notify the sales staff to assist.

k

(9)Similar to most Solid state devices; LEDs are sensitive to Electro-Static Discharge (ESD) and Electrical Over Stress (EOS). JCB k

(10) Other points for attention, please refer to our relevant information. k

0755-2967-5000
0755-6683-9322
sales@refond.com

www.refond.com

Declare

This specification is written both in English and in Chinese and the latter is formal.

k

0755-2967-5000
0755-6683-9322
sales@refond.com